
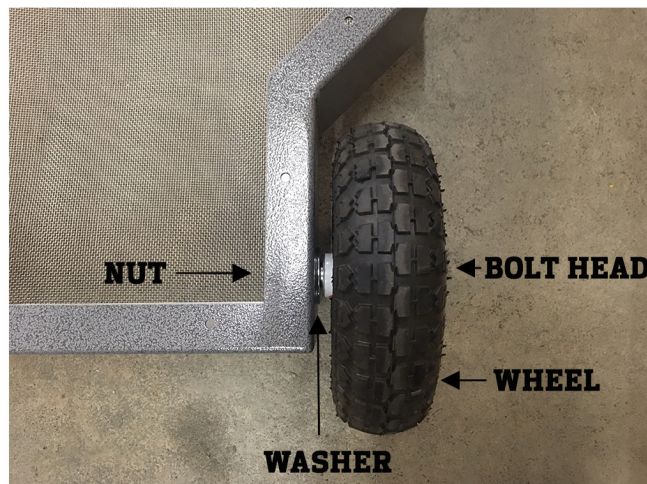


SAND GRATE ASSEMBLY INSTRUCTIONS

You will need to attach both wheels using the bolts with a washer in between the wheel and the frame.

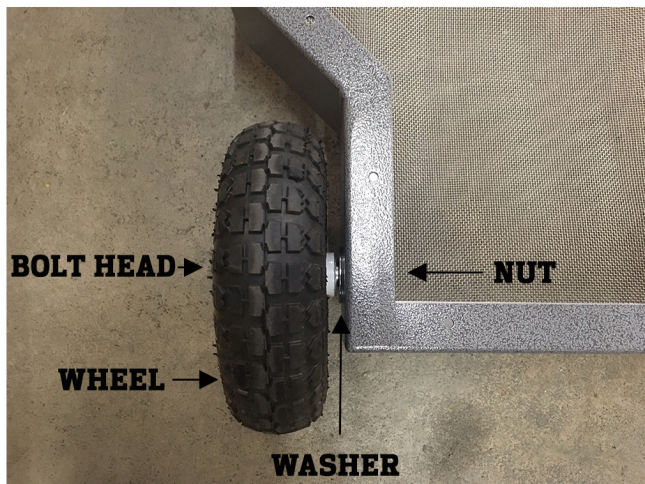

Next you will want to attach your handle to the frame using the 4 bolts and nuts. You can adjust the angle of the handle to match different operator heights.

Sand Grate Devices work best with VERY DRY SAND as dry sand doesn't clump as easily and flows faster through the screen.

Call 1-800-494-3933 if you need additional help.

